




## F-100-AIR FLUX RECOVERY UNIT

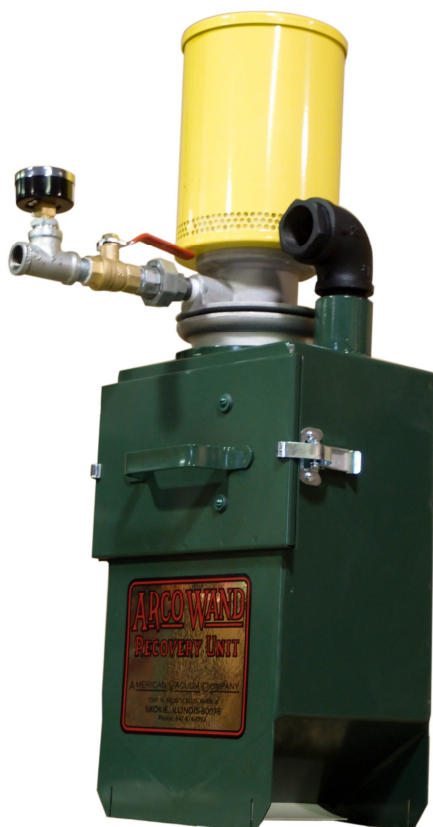

*The F-100-AIR is a direct hopper mount flux recovery unit. It is light, compact, non-electric, continuous duty and simple in operation. 2 to 3 times the recovery rate of comparable electric units.*

### F-100-AIR Common Features:

- Patented venturi power head
- Adapts to any weld hopper
- 3 Different venturi jets to choose from
- Flux discharges into weld hopper when unit is turned off
- Oversized, heavy duty cartridge filter
- Unit can be mounted right or left handed
- Slag screen standard
- Guaranteed 24 hour per day operation
- Powder coat finish paint

### Optional Features:

- Magnetic Separator available
- 1/2" Supply air hose available
- Special fine dust filters
- Complete selection of 1-1/2" recovery tools

### F-100-AIR Model Specific Features:

	F-100-AIR
Compressed Air Req'd:	90PSIG @ 40SCFM
CFM (Maximum)	145
Vacuum (Maximum)	180" H2O
Airline Size	1/2"
Dimensions L, W , H	26" x 7.5" x 9"
Flux Storage Capacity	25 Lbs.
Flux recovery rate	65 lbs per min
Weight	45 Lbs.



**See our Middleweight & Heavyweight Flux Recovery Data Sheets**